



JLG
GENUINE



MaxQuip

BATTERY CATALOG

JLG GENUINE AND MAXQUIP

JLG

Batteries, Chargers and Accessories

You depend on power. Whether you're changing a light bulb in a hospital or constructing a 100 ft building, reliability of the batteries powering your machine is crucial. Choosing the right battery, charger and accessories can help you optimize your productivity.

Don't settle for less than the best. Our long-lasting, durable products add value to your machine and result in increased uptime. Whether you're looking for products for your JLG® equipment or another piece of machinery in your fleet, we've got you covered with easy-to-order, reliable parts.





JLG Genuine parts are OEM-approved for your JLG® boom lift, scissor lift or telehandler.

Batteries
 Starter.....4-5
 Deep Cycle.....6-7
 AGM.....8-9

Battery Chargers
 Delta Q.....10

Accessories/Tools
 QuiQ Programmer.....11



MaxQuip™ competitive parts include various manufacturers and industries to service your complete fleet.

Batteries
 Starter.....13
 Deep Cycle.....14-15
 AGM.....16-17

Battery Chargers
 Pro Charging Systems.....18-21
 AGM/BC.....22-23

Battery Discharger.....24

Accessories/Tools
 Battery Tester.....25

To Place an Order

Online: onlineexpress2.jlg.com **Call:** 1-877-JLG-LIFT (1-877-554-5438) **Fax:** 1-800-733-8939

SPECIAL INFORMATION REGARDING BATTERIES IN THIS CATALOG

WARNING

Do not install or charge batteries in a sealed or non-ventilated compartment. Constant under- or over-charging, as well as incorrect charging, will damage the battery, shorten its life and void the warranty.

NOTICE

For charging, it is recommended to stay between 0 to 120°F (-18 to 49°C) to avoid charging frozen batteries at low temperatures or going into thermal runaway at high temperatures.

For discharging, it is recommended to stay between -20 to 120°F (-29 to 49°C). Batteries discharged at temperatures below 32°F (0°C) should be recharged immediately to avoid freezing. Batteries discharged at temperatures above 120°F (49°C) should be allowed to cool before recharging.

NOTES

Minutes of discharge represent the number of minutes a battery can deliver when discharged at a constant rate at 80°F (27°C) and maintain a voltage above 1.75V per cell. Capacities are based on peak performance.

The number of amp-hours (AH) represents the number of hours a battery can deliver when discharged at a constant rate at 80°F (27°C) and maintain a voltage above 1.75V per cell. Capacities are based on peak performance.

C.C.A. (Cold Cranking Amps) represents the discharge load in amperes that a new, fully charged battery can maintain for 30 seconds at 0°F at a voltage above 1.2V per cell.

C.A. (Cranking Amps) represents the discharge load in amperes that a new, fully charged battery can maintain for 30 seconds at 32°F at a voltage above 1.2V per cell. This is sometimes referred to as marine cranking amps at 32°F or M.C.A. at 32°F.

Dimensions are taken from the bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal and battery manufacturer.

Terminal options may vary from distributor to distributor. Choosing terminals is not an option. A battery fit, form and function should not be affected by the terminal.

Weights may vary.

Note: All names/trademarks are the property of their respective owners and/or manufacturers.

Starter Batteries

JLG now handles all starter batteries for ease of purchasing.
Fulfill all your battery needs from one place!



TYPE	MACHINE		PRODUCT TYPE	CAPACITY		DIMENSIONS & WEIGHT (EACH)				JLG PART NUMBER (EACH)
	MODELS	SERIAL NUMBER BREAKS	BCI GROUP SIZE	C.C.A.	C.A.	LENGTH IN. (MM)	WIDTH IN. (MM)	HEIGHT IN. (MM)	WEIGHT LB (KG)	
12 VOLT STARTER BATTERIES - TOP POST										
JLG® BOOMS	18RS/SJ/25RTS/33RTS/34HA/45HA/40IC/40H/HT/H+6/40RTS/400RTS/45IC/45HA/50H/HT/60H/HA/HT/HTH/H+6/70H/80H/HX/HX+6/86HX/100HX/HX+6/HX+10/100SX/110HX/HXER/110SX/SXJ/120HX/120SXJ/150HAX/500RTS/CM25RT/CM33RT/CM40RT		24	700	850	10.25 (260)	6.81 (173)	8.875 (225)	41 (19)	0400003*
	E/M400A/AJP/AJPNARROW/E/M450A/AJ/E/M450A/AJ/M40AJ/AJPNARROW/M45A/AJ/M600J/JP/T500J	ALL	51R	450	525	9.375 (238)	5.062 (129)	8.730 (222)	28 (13)	0400201
	50H/60H/H+6/70H/80H/HX/HX+6/86HX/100HX+6/100SX/SXJ/110HX/HXER/110SX/SXJ/120HX/120SXJ/150HAX/1100SJP/1200SJP/1350SJP/1250AJP/1500AJP/1500SJ/1850SJ	ALL	4D	1050	1280	20.75 (527)	8.50 (216)	10.15 (258)	45 (20)	0400020*
JLG® SCISSORS	25RTS/33RTS/40RTS/400RTS/330CRT/400CRT/400RTS/50H/500RTS/26/260MRT/CM25RT/CM33RT/CM40RT		24	700	850	10.25 (260)	6.81 (173)	8.875 (225)	41 (19)	0400003*
	3369LE/4069LE/M3369/M4069	0200230092 - PRESENT	51R	450	525	9.375 (238)	5.062 (129)	8.730 (222)	28 (13)	0400201
SKYTRAK® LEGACY	6036	14834-19988, 0160002345-0160044900	27	850	1020	12.047 (306)	6 (152)	9 (228)	66 (30)	8270144
	6042	17019-19897, 0160002408-160045063, EXCLUDING: 0160042742, 0160042747 & 0160042747	27	850	1020	12.047 (306)	6 (152)	9 (228)	66 (30)	8270144
	8042/10042/10054	13198-19987, 0160002332-0160045255 INCLUDING 0160045255, EXCLUDING: 0160042754, 0160042762, 0160042877, 0160042911, 0160043185, 0160043220 & 0160043244	27	850	1020	12.047 (306)	6 (152)	9 (228)	66 (30)	8270144
LULL®	644E-42/944E-42	17569-20112, 0160002514-PRESENT	27	850	1020	12.047 (306)	6 (152)	9 (228)	66 (30)	8270144
GROUP 31 HEAVY DUTY STARTER BATTERIES										
JLG® BOOMS	24RS/RSJ/34HA/40HA/H/H+6/45HA/60HA/340AJ/400S/SC/450A/AJ/AJ SERIES II/460SJ/600A/AJ/600S/SC/SJ/SJC/601S/660SJ/680S/740AJ/800A/AJ/800S/860SJ	ALL	31P	1000	1200	13 (330)	6.812 (173)	9.438 (240)	41 (19)	0400075*
	510AJ	1300000100-PRESENT; PRIOR TO AND INCLUDING E300001114	31P	1000	1200	13 (330)	6.812 (173)	9.438 (240)	41 (19)	0400075*
JLG® SCISSORS	25RTS/33RTS/40RTS/400RTS	ALL	31P	1000	1200	13 (330)	6.812 (173)	9.438 (240)	41 (19)	0400075*
	3394RT/4394RT	ALL	31P	1000	1200	13 (330)	6.812 (173)	9.438 (240)	41 (19)	0400075*
	530LRT	ALL	31P	1000	1200	13 (330)	6.812 (173)	9.438 (240)	41 (19)	0400075*

Starter Batteries (cont.)

MACHINE			PRODUCT TYPE	CAPACITY		DIMENSIONS & WEIGHT (EACH)				JLG PART NUMBER (EACH)
TYPE	MODELS	SERIAL NUMBER BREAKS	BCI GROUP SIZE	C.C.A.	C.A.	LENGTH IN. (MM)	WIDTH IN. (MM)	HEIGHT IN. (MM)	WEIGHT LB (KG)	
JLG® TELEHANDLERS	642/1043/943	ALL	31P	1000	1200	13 (330)	6.812 (173)	9.438 (240)	41 (19)	0400075*
	619A/723A	PRIOR TO AND INCLUDING 1160007966	31	1090	1370	13 (330.2)	6.8 (172.7)	9.41 (238.8)	75 (34.1)	1001091683
	723A	PRIOR TO AND INCLUDING 1160007966	31	900		13 (330.2)	6.8 (172.72)	9.44 (239.8)		1001155219
	G5-19A		31	1090	1370	13 (330.2)	6.8 (172.7)	9.41 (238.8)	75 (34.1)	1001091683
	G6-23A		31	1090	1370	13 (330.2)	6.8 (172.7)	9.41 (238.8)	75 (34.1)	1001091683
	G6-42A/G9-43A/G10-43A	0160048648-PRESENT	31P	1000	1200	13 (330)	6.812 (173)	9.438 (240)	41 (19)	0400075*
	G6-42A	0190001-0190457, 0160000022-0160048656	31	1000	1225	12.99 (329)	6.76 (172)	9.45 (240)	63 (29)	91083483
	G9-43A/G10-43A	0193001-0193007, 0160000008-0160048670; INCLUDING 0160048773	31	1000	1225	12.99 (329)	6.76 (172)	9.45 (240)	63 (29)	91083483
	G10-55A/G12-55A (ALL NON-JOHN DEERE AND PERKINS ENGINES)	ALL	31	1000	1225	12.99 (329)	6.76 (172)	9.45 (240)	63 (29)	91083483
	G10-55A/G12-55A (ALL JOHN DEERE AND PERKINS ENGINES)	PRIOR TO AND INCLUDING 0160045636; EXCLUDING: 0160045082, 0160045094, 0160045209, 0160045295, 0160045926 & 0160045449	31	1000	1225	12.99 (329)	6.76 (172)	9.45 (240)	63 (29)	91083483
	G15-18A	ALL	31P	1000	1200	13 (330)	6.812 (173)	9.438 (240)	41 (19)	0400075*
	2505/H	ALL	31P	1000	1200	13 (330)	6.812 (173)	9.438 (240)	41 (19)	0400075*
TF6-42	0192001-0192007, 0160000052-PRESENT	31	1000	1225	12.99 (329)	6.76 (172)	9.45 (240)	63 (29)	91083483	
SKYTRAK® LEGACY	6036	PRIOR TO AND INCLUDING 14834	24	525	N/A	10.24 (259.3)	6.76 (172)	8.66 (220.9)	N/A	8270014
	6036	14834-19988, 0160002345-0160044900	27	850	1020	12.047 (306)	6 (152)	9 (228)	66 (30)	8270144
	6042	17019-19897, 0160002408-160045063; EXCLUDING: 0160042742, 0160042747 & 0160042747	27	850	1020	12.047 (306)	6 (152)	9 (228)	66 (30)	8270144
	8042/10042/10054	PRIOR TO AND INCLUDING 13197	24	525	N/A	10.24 (259.3)	6.76 (172)	8.66 (220.9)	N/A	8270014
	8042/10042/10054	13198-19987, 0160002332-0160045255; INCLUDING 0160045255; EXCLUDING: 0160042754, 0160042762, 0160042877, 0160042911, 0160043185, 0160043220 & 0160043244	27	850	1020	12.047 (306)	6 (152)	9 (228)	66 (30)	8270144
GRADALL	534C-9	0344001-PRESENT	31	1000	1225	12.99 (329)	6.76 (172)	9.45 (240)	63 (29)	91083483
	534C-10	0266001-PRESENT	31	1000	1225	12.99 (329)	6.76 (172)	9.45 (240)	63 (29)	91083483
	534D-9/534D-10	ALL	31P	1000	1200	13 (330)	6.812 (173)	9.438 (240)	41 (19)	0400075*
	534D-9/534D-10	ALL	31	1000	1225	12.99 (329)	6.76 (172)	9.45 (240)	63 (29)	91083483
	544C	0255001-PRESENT	31	1000	1225	12.99 (329)	6.76 (172)	9.45 (240)	63 (29)	91083483
	544D	0355001-0455362, 0160000192-PRESENT	31	1000	1225	12.99 (329)	6.76 (172)	9.45 (240)	63 (29)	91083483
	G6-42P	0189001-0189345, 0160000230-PRESENT	31	1000	1225	12.99 (329)	6.76 (172)	9.45 (240)	63 (29)	91083483
LULL®	644E-42/944E-42	17569-20112, 0160002514-PRESENT	27	850	1020	12.047 (306)	6 (152)	9 (228)	66 (30)	8270144

*Batteries carry a one-year limited manufacturer's warranty. To make a warranty claim, please contact 1-800-695-0945. Refer to Special Information Regarding Batteries on page 3. Can't find what you're looking for? Contact the Aftermarket Parts Team at 877-JLG-LIFT (877-554-5438) or visit online at www.jlg.com.

Deep Cycle Batteries

JLG Genuine deep cycle batteries provide the durability and power you need to help achieve maximum uptime on the job site every day. Operate at peak levels of performance with these factory-approved batteries for your JLG equipment.

Features and Benefits

- Worry-free operation
- Long-lasting and durable for maximum production
- Environmentally friendly products that are made from recycled material and can be recycled

Ordering Details

- Prompt delivery in continental U.S.
- No minimum requirement necessary to purchase batteries
- Save more when you buy more with pallets
- Easy online ordering



JLG® MACHINES			PRODUCT TYPE	MINUTES OF DISCHARGE			DIMENSIONS & WEIGHT (EACH)				JLG PART NUMBER (EACH)	JLG PART NUMBER (PALLET)	PALLET QTY
TYPE	MODELS	SERIAL NUMBER BREAKS		BCI GROUP SIZE	5 HR RATE (AH)	20 HR RATE (AH)	MIN. @ 75 AMPS	LENGTH IN. (MM)	WIDTH IN. (MM)	HEIGHT IN. (MM)			
6 VOLT DEEP CYCLE FLOODED BATTERIES													
BOOMS	30E/35E/40E/45E/N35E/N40E	ALL	901	217	255	159	11.75 (298)	7.13 (181)	11.50 (292)	75 (34)	0400069*		
	30E/35E/40E/45E/N35E/N40E	ALL	902	245	305	182	11.875 (302)	7.12 (181)	14.63 (372)	97 (44)	0400121		
	30E/35E/40E/45E/N35E/N40E/34HA/45HA/E300/A/AJ/AJP/E40AJP/AJPNarrow/E/M45A/AJ/E/M400A/AJ/AJP/AJPNarrow/E/M450A/AJ	ALL	903	297	385	225	11.75 (298)	7.12 (181)	16.38 (416)	89 (40)	0400055*	70010769	16
	45HA	ALL	GC2	198	242	140	10.24 (260)	7.125 (181)	10.777 (274)	61 (28)	0400067*		
	E300AJ/AJP	0300138358-PRESENT	902	261	310	195	11.876 (302)	7.126 (181)	14.625 (371)	60 (27)	1001105091*		
	E/M600/J/JJP	ALL	903	323	420	250	11.75 (298)	7.125 (181)	16.5 (419)	95 (43)	0400202*		
	T350/T500J	ALL	GC2	172	216	114	10.24 (260)	7.11 (181)	11.26 (286)	44 (20)	0400215*	70010279	48

Deep Cycle Batteries (cont.)

JLG® MACHINES			PRODUCT TYPE	MINUTES OF DISCHARGE			DIMENSIONS & WEIGHT (EACH)				JLG PART NUMBER (EACH)	JLG PART NUMBER (PALLET)	PALLET QTY
TYPE	MODELS	SERIAL NUMBER BREAKS	BCI GROUP SIZE	5 HR RATE (AH)	20 HR RATE (AH)	MIN. @ 75 AMPS	LENGTH IN. (MM)	WIDTH IN. (MM)	HEIGHT IN. (MM)	WEIGHT LB (KG)			
6 VOLT DEEP CYCLE FLOODED BATTERIES													
SCISSORS	1532E2/1932E2/2032E2/2632E2/2646E2/3246E2/1532E3/1932E3/2033E3/2046E3/2646E3/2658E3/1230ES/1930ES/2030ES/2032ES/2630ES/2632ES/2646ES/3246ES/6/10RS/R6/R10/1932RS/2932RS/3248RS	ALL	GC2	172	216	114	10.24 (260)	7.11 (181)	11.26 (286)	44 (20)	0400215*	70010279	48
	1932E/2033E/2046E/4646E/2658E/CM1432/CM1432PLUS/CM1732	ALL	GC2	198	242	140.00	10.24 (260)	7.125 (181)	10.777 (274)	61 (28)	0400067*		
	3369E/3969E/CM2033/CM2046/CM2546/CM2558	ALL	901	217	255	159	11.75 (298)	7.13 (181)	11.50 (292)	75 (34)	0400069*		
	1532E2/1932E2/2032E2/2632E2/2646E2/3246E2/1532E3/1932E3/2033E3/2046E3/2646E3/2658E3		GC2H	213	251	154	10.39 (264)	7.20 (183)	11.69 (297)	70 (32)	0400216*		
	1932R	ALL	GC2	181	232	122	10.24 (260)	7.11 (181)	11.26 (286)	29 (13)	1001216180*		
	1930ES	PRIOR TO AND INCLUDING 0200135154	GC2H	213	251	154	10.39 (264)	7.20 (183)	11.69 (297)	70 (32)	0400216*		
	2030ES/2630ES	0200135154-0200239381	GC2H	213	251	154	10.39 (264)	7.20 (183)	11.69 (297)	70 (32)	0400216*		
	2032ES/2632ES	ALL	GC2H	213	251	154	10.39 (264)	7.20 (183)	11.69 (297)	70 (32)	0400216*		
	2646ES/3246ES	0200135154-PRESENT	GC2H	213	251	154	10.39 (264)	7.20 (183)	11.69 (297)	70 (32)	0400216*		
	3369E/3369LE/3969E/4069LE/CM2033/CM2046/CM2546/CM2558 /CM25RT/CM33RT/CM40RT/M3369/M4069	ALL	903	297	385	225.00	11.75 (298)	7.12 (181)	16.38 (416)	89 (40)	0400055*	70010769	16
VERTICALS	13MSPT	ALL	GC2	172	216	114	10.24 (260)	7.11 (181)	11.26 (286)	44 (20)	0400215*	70010279	48
12 VOLT DEEP CYCLE FLOODED BATTERIES													
VERTICALS	10VP/15VP/20VP/12SP/15SP/15/20/25/30/36/41/15AMI/19AMI	ALL	27 M	N/A	105	54	11.75 (298)	6.81 (173)	9.25 (235)	54 (24)	0400122*	70012265	36
TRIPLE L TRAILERS	248/449/1012/1014/4610/7610/7612/7614/7616/EC10/EC12/EC14/UT28/UT410/UT49/UT610/ UT612/UT614/UT912/UT914	ALL	24M	N/A	N/A	N/A	11	6.75 (172)	9 (228)	49.8	70124		

*Batteries carry a one-year limited manufacturer's warranty. To make a warranty claim, please contact 1-800-695-0945.

Refer to Special Information Regarding Batteries on page 3.

Can't find what you're looking for? Contact the Aftermarket Parts Team at 877-JLG-LIFT (877-554-5438) or visit online at www.jlg.com.

AGM Batteries

Discover Lower Cost of Ownership

JLG offers Discover® EV Traction batteries that are maintenance-free and non-hazardous to the environment. With longer life cycles and increased performance, EV Traction dry cell batteries are the solution to your stored energy needs.



Features and Benefits

Dry Cell Technology:

- Extended runtime and battery life
- Copper and stainless steel terminals
- Sealed technology
- Charge retention rate of 97-99% per month
- Non-spillable and maintenance-free
- Limited one-year free replacement warranty from supplier*

Environmental Benefits:

- Environmentally regulated battery of choice
- 99.9% gas recombination efficiency
- 98% recyclable



WARNING

Do not add water or electrolytes. Risk of shock.

NOTICE

Do not throw in the garbage. This product must be recycled.

Warranty goes into effect as of date of purchase. The warranty is void if the batteries are not used with an approved charger or are not maintained correctly. For warranty service or to make a warranty claim, please contact 1-778-776-3288 PST or service@discoverbattery.com.

AGM Batteries

JLG® MACHINES			PRODUCT TYPE	20 HR RATE (AH)	MINUTES OF DISCHARGE			R.C. @25A	C.A. @ 0°F (-18 °C)	DIMENSIONS & WEIGHT (EACH)				JLG PART NUMBER (EACH)
TYPE	MODELS	SERIAL NUMBER BREAKS			BCI GROUP SIZE	@25A	@56A			@75A	LENGTH IN. (MM)	WIDTH IN. (MM)	HEIGHT IN. (MM)	
6 VOLT COMMERCIAL														
BOOMS	E/M600J/JP/M3369/M4069/3369LE/4069LE	PRIOR TO AND INCLUDING 0300219271	L16	390	915	374	255	841	1350	11.6 (295)	71 (180)	16.8 (426)	122.8 (56)	1001102534
	E/M300AJ/AJP/E/M400A/AJP/AJPNARROW/E/M450A/AJ/T350/T500J	ALL	305	312	736	295	208	660	1050	11.6 (295)	71 (180)	14.5 (368)	107.8 (49)	1001114782
SCISSORS	1930ES/2030ES/2630ES	0200152825-PRESENT AND B200000100-PRESENT	GC2	213	475	182	124	404	750	10.2 (260)	71 (180)	10.8 (274)	69.2 (31)	1001112112
	2646ES/3246ES	B200020297-PRESENT AND M200000100-PRESENT	GC2	213	475	182	124	404	750	10.2 (260)	71 (180)	10.8 (274)	69.2 (31)	1001112112
	M3369/M4069/3369LE/4069LE	PRIOR TO AND INCLUDING 0200230091	L16	390	915	374	255	841	1350	11.6 (295)	71 (180)	16.8 (426)	122.8 (56)	1001102534
	R6/R10/10RS/1230ES/1932R/1932RS/3248RS	ALL	GC2	213	475	182	124	404	750	10.2 (260)	71 (180)	10.8 (274)	69.2 (31)	1001112112
VERTICALS	8E/20E/15MSP/20MSP/15MVL/20MVL	ALL	GC2	213	475	182	124	404	750	10.2 (260)	71 (180)	10.8 (274)	69.2 (31)	1001112112
	10MSP	0130021959-PRESENT		200						12 (306)	6.46 (164)	8.66 (220)	63.10 (28.6)	1001177558
	10MSP	ALL	27	214	450	162	112		900	12.05 (306)	6.61 (168)	8.98 (228)	63.9 (29)	1001120445
12 VOLT COMMERCIAL														
BOOMS	H340AJ	ALL	27	99	185	73	52		900	12 (305)	6.61 (168)	9.57 (243)	75 (34)	0400209
	M600/J/JP	0300219271-PRESENT	51R	45				75	440	9.375 (238)	5.062 (129)	8.73 (222)	28 (13)	1001196117
TELEHANDLERS	642/943/1043/1055/1255	ALL	31T	140	335	98	71	310	800	12.9 (327)	71 (180)	10.8 (274)	89.5 (41)	1001098762
	G15-44A	ALL	31T	140	335	98	71	310	800	12.9 (327)	71 (180)	10.8 (274)	89.5 (41)	1001098762
	G6-42A	0190001-0190457/ 0160000022-PRESENT	31T	140	335	98	71	310	800	12.9 (327)	71 (180)	10.8 (274)	89.5 (41)	1001098762
	G9-43A/G10-43A	0193001-0193007/ 0160048671-PRESENT	31T	140	335	98	71	310	800	12.9 (327)	71 (180)	10.8 (274)	89.5 (41)	1001098762
	G10-55A/G12-55A	PRIOR TO AND INCLUDING 0160045636; EXCLUDING: 0160045082/0160045094/ 0160045209/0160045094/0160045209/ 0160045295/0160045926 & 0160045449	31	114	228	89	63	205	750	13 (330)	71 (180)	9.3 (236)	74.1 (34)	1001125916
	G10-55A/G12-55A	ALL	31T	140	335	98	71	310	800	12.9 (327)	71 (180)	10.8 (274)	89.5 (41)	1001098762
VERTICALS	9MP/10MSP/15DVL/15MSP/15MVL/20DVL/20MSP/20MVL/15DVSP/20DVSP/12SP/15SP/15AMI/19AMI/20AM/25AM/30AM/36AM/41AM	ALL	27	99	185	73	52		900	12 (305)	6.61 (168)	9.57 (243)	75 (34)	0400209
	15MSP/20MSP/15MSP/15MVL	0130021958-PRESENT	27	100	162		43		600	12.70 (323)	6.80 (172)	8.90 (226)	63.9 (27)	1001178278

Refer to Special Information Regarding Batteries on page 3.

Can't find what you're looking for? Contact the Aftermarket Parts Team at 877-JLG-LIFT (877-554-5438) or visit online at www.jlg.com.

Delta Q Battery Charger

Our industrial battery chargers meet high standards of reliability, charge quality and ease of integration.



JLG® MACHINES	MODELS	ITEM DESCRIPTION	VOLTAGE	AMPERAGE	WEIGHT (LB)	ITEM NUMBER
BOOMS	E/M400A/AJ/AJP/NARROW/E/M450A/AJ/AJP/ E/M600J/JP/M3369/M4069/3369LE/4069LE	CHARGER, BATTERY 48V	48V	20A	10.5	1001103105
SCISSORS	1230ES/1930ES/2030ES/2032ES/ 2630ES/2632ES/2646ES/3246ES	CHARGER, BATTERY 24V	24V	25A	10.5	1001112111
	R6/R10/6RS/10RS/1932RS/3248RS	CHARGER, BATTERY 24V	24V	25A	10.5	400236
VERTICAL MAST	10MSP/15MSP/15MVL/20MSP/20MVL	CHARGER, BATTERY 24V	24V	25A	10.5	1001102932
	20MSP/20MVL	CHARGER, BATTERY 24V	24V	25A	10.5	1001136381
VERTICAL LIFT	8E/10E/20E/26E/13MSPT	CHARGER, BATTERY 24V UNIVERSAL	24V	25A	10.5	1001129847
	12E/32E/H340AJ	ELEC ASSY, CHARGER/CONVERTER	48V	19.5A	10.5	1001152650

Refer to Special Information Regarding Batteries on page 3.

Can't find what you're looking for? Contact the Aftermarket Parts Team at 877-JLG-LIFT (877-554-5438) or visit online at www.jlg.com.

QuiQ™ Programmer

The QuiQ™ Series of battery chargers has been designed to provide reliable, quality charging for battery systems in electric-drive vehicles. The QuiQ Programmer is a new field reprogramming software that enables you to add or change the charge algorithm of your QuiQ charger.



Features and Benefits

- Kit includes software, USB cable and interface module
- Remove charging algorithm
- Add or change charging algorithm

JLG PART NUMBER	2915230
------------------------	---------

Installation Guide*

1. Install the software on your computer.
2. Connect the QuiQ charger to your computer.
3. Launch the QuiQ Programmer on your computer.
4. Select your COM port.
5. Verify communications with the charger.
6. Select/add/remove your desired algorithm.

*Detailed instructions are included with each kit. Consult factory if lost or missing.

New Serial Number Sticker

You will only be able to change the algorithms on chargers that have the black circle on the serial number.



Refer to Special Information Regarding Batteries on page 3.

Can't find what you're looking for? Contact the Aftermarket Parts Team at 877-JLG-LIFT (877-554-5438) or visit online at www.jlg.com.

Stocked for Success

The MaxQuip expansive parts line carries over 18,000 SKUs across 50+ product categories. You also get warranty-backing and an easy-to-use online ordering portal. When you order from JLG, you receive high-quality parts with the same form, fit and function as parts from original equipment manufacturers (OEMs).



Starter Batteries

MaxQuip starter batteries make it convenient to fulfill all your battery needs from one place. Order your starter battery by either the JLG part number or the Trojan® part number.



PRODUCT TYPE		CAPACITY		DIMENSIONS & WEIGHT (EACH)			JLG PART NUMBER (EACH)
BCI GROUP SIZE	TROJAN® PART NUMBER	C.C.A.	C.A.	LENGTH IN. (MM)	WIDTH IN. (MM)	HEIGHT IN. (MM)	
12 VOLT STARTER BATTERIES - TOP POST							
N/A	24FLTV	770	1000	10.75 (273)	6.8125 (173)	9 (229)	7016027
51R	51R-75	450	530	9.375 (238)	5.0625 (129)	8.8125 (224)	7025887
24	24SM-6MF	600	750	11 (279)	6.875 (175)	9.5 (241)	7016022
26	26-75	525	655	8 (203)	6.75 (171)	7.75 (197)	7025873
34	34-75	700	875	10.25 (260)	6.88 (175)	7.75 (197)	7016038
47/H5	47-75	650	810	9.56 (243)	6.94 (176)	7.75 (197)	7016045
24	24SM-8MF	800	1000	11 (279)	3.88 (99)	8.75 (222)	7025869
27	27-75	810	1000	12.06 (305)	6.81 (173)	8.88 (226)	7016035
35	35-75	640	800	9 (229)	6.88 (175)	8.75 (222)	7025880
65	65-75	850	1000	12 (305)	7.5 (191)	7.5 (191)	7016057
34/78	78DT-75	800	1000	10.31 (262)	6.88 (175)	7.81 (198)	7016000
27	DC27	600	750	12.75 (324)	6.75 (171)	9.5 (241)	7025965
12 VOLT COMMERCIAL STARTER BATTERIES							
4D	C-4D	1000	1200	20.75 (527)	8.75 (222)	9.875 (251)	7025901
8D	C-8DH	1400	1750	20.75 (527)	11 (279)	9.63 (245)	7016075
GROUP 31 HEAVY DUTY STARTER BATTERIES							
31P	C-31-10AP	925	1140	13 (330)	6.8125 (173)	9.4375 (240)	7025902
31S	C-31-10ST	925	1140	13 (330)	6.8125 (173)	9.4375 (240)	7016080
GROUP 31 MF SEVERE DUTY STARTER BATTERIES							
31XHD	C-31-10APMF	1000	1250	13 (330)	6.8125 (173)	9.4375 (240)	7025903
POST	C-31-7APMF	725	900	13 (330)	6.8125 (173)	9.4375 (240)	7016085
31XHD	C-31-10STMF	1000	1250	13 (330)	6.8125 (173)	9.4375 (240)	7025904
STUD	C-31-7STMF	725	900	13 (330)	6.8125 (173)	9.4375 (240)	7016086

Top-selling products are bolded.

Limited Supplier Warranty from date of purchase. Starter batteries carry a 12-month warranty. The warranty will be void if the batteries are not used with an approved charger or are not maintained correctly.

To make a warranty claim, please contact 1-800-423-6569 PST. Transportation expenses not included.

Refer to Special Information Regarding Batteries on page 3.

Can't find what you're looking for? Contact the Aftermarket Parts Team at 877-JLG-LIFT (877-554-5438) or visit online at www.maxquip.jlg.com.

Deep Cycle Batteries

MaxQuip deep cycle batteries are some of the most powerful and durable batteries available today. They are designed to operate at peak levels of performance in even the harshest conditions or most challenging locations. With our batteries, you'll achieve maximum uptime on the job site, which means more profits for your company.

Engineered to provide rugged durability, outstanding performance and long life, MaxQuip deep cycle flooded batteries are perfectly suited for use in a variety of applications. They feature an advanced, historically proven battery technology for maximum sustained performance, longer life and increased total energy.



Features and Benefits

- Batteries for various industries, including golf carts, utility electric vehicles, aerial work platforms and floor cleaning machines
- Lower total cost of ownership to last the long haul
 - Delivers 30% greater life (on average)
 - 33% more energy in cycling applications
 - 15% thicker back web for longer battery life
- Maximum sustained performance and higher total energy
- Maximum operating performance with more sustained capacity and higher total accumulated amp-hours
- Durable embedded terminals in most products
- Grid technology reduces downtime
- Engineering expertise backed by 200 years of deep cycle experience
- Certified by DNV ISO 9001:2008
- Life cycle testing conducted in accordance with BCI test procedures – BCIS-06 specification
- Over 100 electrical test circuits for both field simulations and accelerated life cycle testing
- 18-month warranty from date of purchase*
- Made in the USA
- 97% recyclable (container plastic, battery lead and electrolyte from old deep cycle batteries can be recycled)

Ordering Details

- Local distribution for prompt delivery in continental U.S. and Canada through hundreds of ship-from locations in North America
 - Shipments to Alaska and Hawaii will incur an additional \$10 - \$22 charge per battery**
 - Shipments to remote Canadian areas may take up to two weeks to deliver**
- No additional distribution costs for batteries
- No minimum requirement necessary to purchase batteries
- Save more when you buy more with pallets
- Battery cores can be returned for current lead rate/price (approximately \$10-\$20)***
- Easy online ordering

Note: Pricing can change quarterly

* Limited Supplier Warranty from date of purchase. Deep cycle batteries carry an 18-month warranty. The warranty will be void if the batteries are not used with an approved charger or are not maintained correctly. To make a warranty claim, please contact 1-800-423-6569 PST. Transportation expenses not included.

** See Appendix on page 26 for remote location information.

*** JLG is not responsible for core returns nor what the customer receives as payment for their core.

Can't find what you're looking for? Contact the Aftermarket Parts Team at 877-JLG-LIFT (877-554-5438) or visit online at www.maxquip.jlg.com.

Deep Cycle Batteries

Order your starter battery by either the JLG part number or the Trojan® part number.

PRODUCT TYPE BCI GROUP SIZE	TROJAN® PART NUMBER	MINUTES OF DISCHARGE				DIMENSIONS & WEIGHT (EACH)				JLG PART NUMBER (EACH)	JLG PART NUMBER (PALLET)	PALLET QTY
		5 HR RATE (AH)	20 HR RATE (AH)	100 HR RATE (AH)	KILOWATT HRS @ 100 HR RATE KWH	LENGTH IN. (MM)	WIDTH IN. (MM)	HEIGHT IN. (MM)	WEIGHT LB (KG)			
6 VOLT DEEP CYCLE FLOODED BATTERIES												
GC2	T605	175	210	232	1.39	10.30 (262)	7.11 (181)	11.07 (281)	58 (26)	70012277	70012277PLT	40
GC2	T105	185	225	250	1.50	10.30 (262)	7.11 (181)	11.07 (281)	62 (28)	7025954	7025954PLT	40
GC2	T105 PLUS	185	225	250	1.50	10.30 (262)	7.11 (181)	11.07 (281)	62 (28)	70012278*	70012278PLT	40
GC2	T125	195	240	266	1.60	10.30 (262)	7.11 (181)	11.07 (281)	66 (30)	70012279	70012279PLT	40
GC2	T125 PLUS	195	240	266	1.60	10.30 (262)	7.11 (181)	11.07 (281)	66 (30)	70012280*	70012280PLT	40
GC2H	T145	215	260	287	1.72	10.30 (262)	7.11 (181)	11.90 (302)	72 (33)	7025957	7025957PLT	40
GC2H	T145 PLUS	215	260	287	1.72	10.30 (262)	7.11 (181)	11.90 (302)	72 (33)	70012281*	70012281PLT	40
901	J250G	195	235	261	1.57	12.17 (309)	6.85 (174)	11.43 (290)	67 (30)	70012282	70012282PLT	36
901	J250P	215	230	250	2.78	11.66 (296)	6.94 (176)	11.54 (293)	72 (33)	70012319	70012319PLT	36
902	J305E-AC	250	305	339	2.03	12.27 (312)	6.85 (174)	14.41 (366)	83 (38)	70012283	70012283PLT	18
902	J305G-AC	258	315	350	2.10	12.27 (312)	6.85 (174)	14.41 (366)	88 (40)	70012284	70012284PLT	18
902	J305P-AC	271	330	367	2.20	11.66 (296)	6.94 (176)	14.42 (366)	96 (44)	70012285	70012285PLT	18
902	J305H-AC	295	360	400	2.40	11.66 (296)	6.94 (176)	14.42 (366)	98 (45)	70012286	70012286PLT	18
903 (L16)	L16E-AC	303	370	411	2.47	12.25 (311)	6.85 (174)	16.41 (417)	99 (45)	7025949	7025949PLT	18
903	L16G-AC	320	390	433	2.60	12.25 (311)	6.85 (174)	16.41 (417)	101 (46)	70012287	70012287PLT	18
903	L16P-AC	344	420	467	2.80	11.66 (296)	6.94 (176)	16.74 (425)	114 (52)	7025958	7025958PLT	18
903	L16H-AC	357	435	483	2.89	11.66 (296)	6.94 (176)	16.74 (425)	125 (57)	70012288	70012288PLT	18
8 VOLT DEEP CYCLE FLOODED BATTERIES												
GC8	DC-8V	135	160	176	1.42	10.21 (259)	7.06 (179)	11.14 (283)	61 (28)	70012289	70012289PLT	40
GC8	T875	145	170	189	1.51	10.21 (259)	7.06 (179)	11.14 (283)	63 (29)	70012290	70012290PLT	40
12 VOLT DEEP CYCLE FLOODED BATTERIES												
24	24TMX	70	85	94	1.13	10.92 (277)	6.62 (168)	9.25 (235)	47 (21)	70012291	70012291PLT	60
27	27TMX	85	105	117	1.40	12.72 (323)	6.60 (168)	9.24 (235)	55 (25)	7025959	7025959PLT	45
27	27TMH	95	115	128	1.54	12.72 (323)	6.60 (168)	9.24 (235)	55 (25)	70012305	70012305PLT	45
30H	31XHS	105	130	144	1.73	12.97 (329)	6.75 (171)	9.58 (243)	67 (30)	70012292	70012292PLT	45
N/A	T1275	120	150	166	1.99	12.96 (329)	7.13 (181)	10.71 (272)	82 (37)	70012293	70012293PLT	30
N/A	T1275 PLUS	120	150	166	1.99	12.96 (329)	7.13 (181)	10.71 (272)	82 (37)	70012294*	70012294PLT	30
N/A	J150	120	150	166	1.99	13.70 (348)	7.13 (181)	11.13 (283)	84 (38)	70012295	70012295PLT	15
921	J185E-AC	144	175	194	2.33	15.52 (394)	6.90 (175)	15.20 (386)	102 (46)	70012296	70012296PLT	12
921	J185G-AC	152	185	205	2.46	15.52 (394)	6.90 (175)	15.20 (386)	106 (48)	70012297	70012297PLT	12
921	J185P-AC	168	205	226	2.71	14.97 (380)	6.91 (176)	14.71 (374)	114 (52)	70012298	70012298PLT	12
922	J185H-AC	168	205	226	2.71	14.97 (380)	6.91 (176)	14.71 (374)	117 (56)	70012299	70012299PLT	12

Top-selling products are bolded.

NOTICE: Watering not applicable.

*Batteries carry a one-year limited manufacturer's warranty. To make a warranty claim, please contact 1-800-695-0945.

Refer to Special Information Regarding Batteries on page 3.

Can't find what you're looking for? Contact the Aftermarket Parts Team at 877-JLG-LIFT (877-554-5438) or visit online at www.maxquip.jlg.com.

AGM Batteries

Discover Lower Cost of Ownership

Discover® EV Traction batteries are maintenance-free and non-hazardous to the environment. With longer life cycles and increased performance, EV Traction dry cell batteries are the solution to your stored energy needs.

Features and Benefits

Dry Cell Technology:

- Extended runtime and battery life
- Copper and stainless steel terminals
- Sealed technology
- Charge retention rate of 97–99% per month
- Non-spillable and maintenance-free
- Limited one-year free replacement warranty from supplier*



Environmentally Regulated Battery of Choice:

- 99.9% gas recombination efficiency
- 98% recyclable

PRODUCT TYPE BCI GROUP SIZE	20 HR RATE (AH)	MINUTES OF DISCHARGE			R.C. @25A	C.A. @ 0°F (-18°C)	LENGTH IN. (MM)	WIDTH IN. (MM)	HEIGHT IN. (MM)	WEIGHT LB (KG)	JLG PART NUMBER (EACH)
		@25A	@56A	@75A							
6 VOLT AGM BATTERIES											
L16	390	915	374	255	841	1350	11.6 (295)	7.1 (180)	16.8 (426)	122.8 (55.7)	70010347
GC2	255	561	223	146	535	850	10.2 (260)	7.1 (180)	11.6 (295)	86 (39.0)	70010529
GC2	213	475	182	124	404	750	10.2 (260)	7.1 (180)	10.8 (274)	69.2 (31.4)	70010531
27	200	446	171	116	379	675	12 (306)	6.6 (168)	8.9 (225)	67.2 (30.5)	70010532
250	260	572	228	149	546	900	11.6 (295)	7.1 (180)	11.7 (296)	82 (37.2)	70010533
305	312	736	295	208	660	1050	11.6 (295)	7.1 (180)	14.5 (368)	107.8 (48.9)	70010534
8 VOLT AGM BATTERIES											
GC2	170	361	115	75	330	750	10.2 (260)	7.1 (180)	10.8 (274)	66.1 (30.0)	70010535
305	230	533	214	151	478	1050	10.2 (260)	7.1 (180)	14.5 (368)	102.1 (46.3)	70010536
L16	312	732	299	204	673	1450	11 (280)	7.2 (182)	15.7 (399)	117.1 (53.1)	70010537
12 VOLT AGM BATTERIES											
U1	33	53	19	12	52	235	7.8 (198)	5.2 (132)	7.2 (182)	22.3 (10.1)	70010538
22	55	97	37	23	92	275	9.1 (230)	5.4 (138)	8.8 (224)	35.3 (16.0)	70010539
L2/H5 – GROUP 47	60	320	120	88	110	750	13.4 (341)	6.8 (173)	11.2 (284)	88 (40)	70012304
34	70	130	48	32	120	375	10.2 (260)	6.3 (159)	7.2 (183)	45.2 (20.5)	70010540
24	84	161	57	38	150	475	10.7 (272)	6.8 (172)	8.9 (226)	56.2 (25.5)	70010541
27	100	197	77	52	185	600	12.7 (323)	6.8 (172)	8.9 (226)	64.2 (29.1)	70010542
31	114	228	89	63	205	750	13 (330)	7.1 (180)	9.3 (236)	74.1 (33.6)	70010543
31T	140	335	98	71	310	800	12.9 (327)	7.1 (180)	10.8 (274)	89.5 (40.6)	70010544
185	234	518	191	125	446	1175	15.2 (386)	7.1 (180)	14.4 (367)	146.6 (66.5)	70010545
4D	245	535	213	139	497	1275	20.8 (528)	8.7 (222)	9.8 (250)	141.1 (64.0)	70010546
8D	290	666	277	188	614	1500	20.8 (528)	11.1 (282)	9.8 (250)	180.8 (82.0)	70010547
12-210	210	444	185	125	410	1250	21.5 (546)	4.9 (125)	12.7 (323)	132.3 (60.0)	70010548

*Batteries carry a one-year limited manufacturer's warranty. To make a warranty claim, please contact 1-800-695-0945. Refer to Special Information Regarding Batteries on page 3.

WARNING: Do not add water or electrolytes. Risk of shock.

NOTICE: Do not throw in the garbage. This product must be recycled.

Warranty goes into effect as of date of purchase. The warranty is void if the batteries are not used with an approved charger or are not maintained correctly. For warranty service or to make a warranty claim, please contact 1-778-776-3288 PST or service@discoverbattery.com.

AGM Batteries

Delivering Maximum Energy Output

Trojan Reliant Absorbed Glass Mat (AGM) batteries are engineered with an advanced technology feature set that provides outstanding sustained performance and total energy output, delivering quality and reliability. C-Max Technology combines elements to deliver increased total energy output, maximized sustained performance, consistent quality and enhanced durability.

Features and Benefits

- Robust plates and separators extend the life-cycle
- Grid design optimized for high-power density
- Low temperature tolerance
- Shock and vibration resistance
- Low internal resistance for higher discharge current and higher charging efficiency
- 99% recyclable
- Made in the USA



Delivering the Maximum Energy Output in AGM Technology with These Maintenance-Free Batteries.

C-Max Technology delivers:

- Maximized sustained performance and increased total energy through proprietary paste
- Protection against stratification and extension of battery life with unique separator
- Enhanced battery safety flame arrestors
- Increased durability and higher battery cell compression to ensure reliable performance due to plastic polymer case
- Consistent battery quality for dependable battery functionality in deep-cycle AGM applications

BCI GROUP SIZE	Trojan P/N	CAPACITY Minutes			CRANKING PERFORMANCE		CAPACITY - Hours (AH)				Amp 100-Hr Rate	ENERGY (kWh) 100-Hr Rate	DIMENSIONS & WEIGHT EACH				JLG P/N (Singles)	JLG Pallet P/N	Pallet Qty
		25 Amps	56 Amps	75 Amps	C.C.A. @ 0°F	C.A. @ 32°F	5-Hr Rate	10-Hr Rate	20-Hr Rate	100-Hr Rate			LENGTH Inches (mm)	WIDTH Inches (mm)	HEIGHT Inches (mm)	WEIGHT Pounds (kg)			
6 VOLT DEEP-CYCLE AGM BATTERIES WITH C-MAX TECHNOLOGY																			
GC2	T105-AGM	440		115			171	187	217	230	1.38	10.30 (262)	7.06 (179)	10.73 (273)	68 (31)	70013042	70013042PLT	40	
902	J305-AGM	670		185			250	273	310	329	1.97	11.66 (296)	6.94 (176)	14.09 (358)	95 (43)	70013043	70013043PLT	18	
903	L16-AGM	817		215			290	323	370	392	2.35	11.66 (296)	6.94 (176)	16.41 (417)	114 (52)	70013044	70013044PLT	17	
8 VOLT DEEP-CYCLE AGM BATTERIES WITH C-MAX TECHNOLOGY																			
GC8	T875-AGM	320	118				130	142	160	170	1.36	10.30 (262)	7.06 (179)	10.73 (273)	70 (32)	70013104	70013104PLT	40	
12 VOLT DEEP-CYCLE AGM BATTERIES WITH C-MAX TECHNOLOGY																			
921	J185-AGM	389		110			157	171	200	212	2.54	14.97 (380)	6.94 (176)	14.45 (367)	122 (55)	70013046	70013046PLT	23	
12 VOLT DEEP-CYCLE AGM BATTERIES																			
GC12	SAGM 12 135*	280			825	900	112	127	140	144	1.72	13.54 (344)	6.76 (172)	10.88 (276)	100 (45)	70013105	70013105PLT	29	
31	OverDrive AGM 31	180			730	875	84	93	102	112	1.34	13.42 (341)	6.81 (173)	9.21 (234)	69 (31)	70013106	70013106PLT	44	

*Equivalent to T1275-AGM

Can't find what you're looking for? Contact the Aftermarket Parts Team at 877-JLG-LIFT (877-554-5438) or visit online at www.maxquip.jlg.com.

Pro Charging Systems Battery Charger

Extend the Life of Your Batteries

Enhance battery performance with a Pro Charging Systems battery charger. Choose MaxQuip battery chargers to meet the demands of your charging needs. The Pro Charging Systems DeltaVolt® intuitive battery charging technology utilizes sophisticated firmware or software to enable the charger to automatically adapt to the charging needs of a broad range of battery pack capacities.



Features and Benefits

- Dramatically enhance battery performance and extend battery life
- Condition batteries with an advanced charge profile
- Charge batteries to 100% with specific gravity level
- Easy to install and use
- Direct ship from multiple vendor locations
- Made in the USA

MACHINE	SERIAL NUMBER	SPECIFICATION	VOLTAGE	OEM CHARGER PART NUMBER	PRO CHARGING PART NUMBER	RECOMMENDED COMPATIBLE BATTERY CHARGER		
						18 AMP	20 AMP	25 AMP
JLG® SCISSORS								
6RS/1932RS, 10RS/3248RS	ALL	ALL	24	1001129847	I2420OBRMIECRSJLG (20 AMPS) I2425OBRMIECRSJLG (25 AMPS)		1001185630	1001185630
1532E/1932E/2033E/ 2046E/2646E/2658E		ANSI	24	0400178	I2420OBRMLIFT (20 AMPS) I2425OBRMLIFT (25 AMPS)		70010898	70010899
		ANSI	24	2901844 OR 2901846	I2420OBRMJLGE (20 AMPS) I2425OBRMJLGE (25 AMPS)		70010940	70010941
1532E2/1932E2/2032E2/ 2632E2/2646E2/3246E2		ANSI/CE	24	0400170	I2420OBRMLIFT (20 AMPS) I2425OBRMLIFT (25 AMPS)		70010898	70010899
1532E3/1932E3/2033E3/ 2046E3/2646E3/2658E3		ALL	24	0400178	I2420OBRMLIFT (20 AMPS) I2425OBRMLIFT (25 AMPS)		70010898	70010899
1230ES	PRIOR TO 0200197381	ALL	24	100112111	I2425OBRMIECJLG			1001177842
1930ES/2030ES/ 2630ES/2646ES/3246ES	PRIOR TO 0200135154	ALL	24	0400218	I2420OBRM (20 AMPS) I2425OBRM (25 AMPS)		70010943	70010944
	0200135154 - 0200152825	ALL	24	0400220	I2420OBRMCF (20 AMPS) I2425OBRMCF (25 AMPS)		70010945 OR 70011238*	70010946
	1200004293 - PRESENT	ALL	24	0400238/1001128737	I2420OBRMJLG (20 AMPS) I2425OBRMJLG (25 AMPS)		70010900	70010901
3369LE/4069LE/ M3369/M4069		ALL	48	0400188/1001103105	I4818OBRMJLGSJAP	70011319		
1932R/R6/R10		ANSI, CSA		1001200561			1001185630	1001185630
JLG® BOOMS								
E300A/AJ/AJP	PRIOR TO 0300138358	ANSI	48	0400188	I4818OBRMJLGSJAP	70011319		
	PRIOR TO 0300138358	CE/ANSI EXPORT	48	0400190	I4818OBRMJLGSJAP	70011319		
	PRIOR TO 0300138358	AUS/ANSI EXPORT	48	0400191	I4818OBRMJLGSJAP	70011319		
	PRIOR TO 0300138358	JPN	48	0400189	I4818OBRMJLGSJAP	70011319		
	0300138358 - PRESENT	ALL	48	1001103105	I4818OBRMJLGSJAP	70011319		
H340AJ	PRIOR TO 0300209405	ALL	48	1001152650		70011888		
	0300209405 - PRESENT	ALL	48	1001197707		70011888		

Pro Charging Systems Battery Charger (cont.)

MACHINE	SERIAL NUMBER	SPECIFICATION	VOLTAGE	OEM CHARGER PART NUMBER	PRO CHARGING PART NUMBER	RECOMMENDED COMPATIBLE BATTERY CHARGER		
						18 AMPS	20 AMPS	25 AMPS
E/M400A/AJP/ AN/AJPN	PRIOR TO 0300189901	ANSI	48	0400196	I48180BRMJLGS400A	70011289*		
	PRIOR TO 0300189901	CE/ANSI EXPORT	48	0400197	I48180BRMJLGS400A	70011289*		
	PRIOR TO 0300189901	AUS/ANSI EXPORT	48	0400195	I48180BRMJLGS400A	70011289*		
	PRIOR TO 0300189901	JPN	48	0400194	I48180BRMJLGS400A	70011289*		
	PRIOR TO 0300189901	SVC REPLACEMENT	48	1001103105	I48180BRMJLGS400A	70011289*		
	0300189901 - PRESENT	ALL	48	1001103105	I48180BRMJLGS400A	70011289*		
E/M450A/AJ	PRIOR TO 300189898 EXC 0300185900 & 0300186011	ANSI	48	0400196	I48180BRMJLGS400A	70011289*		
	PRIOR TO 0300189898 EXC 0300185900 & 0300186011	CE/ANSI EXPORT	48	0400197	I48180BRMJLGS400A	70011289*		
	PRIOR TO 0300189898 EXC 0300185900 & 0300186011	AUS/ANSI EXPORT	48	0400195	I48180BRMJLGS400A	70011289*		
	PRIOR TO 0300189898 EXC 0300185900 & 0300186011	JPN	48	0400194	I48180BRMJLGS400A	70011289*		
	PRIOR TO 0300189898 EXC 0300185900 & 0300186011	SVC REPLACEMENT	48	1001103105	I48180BRMJLGS400A	70011289*		
	0300189898 - PRESENT INC 0300185900 & 0300186011	ALL	48	1001103105	I48180BRMJLGS400A	70011289*		
E/M600/J/JJP	PRIOR TO 0300219271	ANSI	48	0400188	I48180BRMJLGS400A	70011319		
	PRIOR TO 0300219271	CE/ANSI EXPORT	48	0400190	I48180BRMJLGS400A	70011319		
	PRIOR TO 0300219271	AUS/ANSI EXPORT	48	0400191	I48180BRMJLGS400A	70011319		
	PRIOR TO 0300219271	JPN	48	0400189	I48180BRMJLGS400A	70011319		
	0300219271 - PRESENT	ALL	48	1001103105	I48180BRMJLGS400A	70011319		
T350/T500J	ALL	MAC CHARGER	24	0400164	I24200BRM (20 AMPS) I24250BRM (25 AMPS)		70010900 OR 70011237*	70010901
JLG® VERTICALS								
15MSP	PRIOR TO 0130010900	CE/LAT/BRAZIL/CHI	24 (NO PLUG)	1001136381	I24200BRM (20 AMPS) I24250BRM (25 AMPS)		70010900 OR 70011237*	70010901
	PRIOR TO 0130010900	AUS	24 (AUS PLUG)	0400241	I24200BRM (20 AMPS) I24250BRM (25 AMPS)		70010900 OR 70011237*	70010901
	0130010900 - PRESENT	ANSI/CSA/CE/AUS/LAT/BRZ/JPN/CHINA	24 (NO PLUG)	1001136381	I24200BRM (20 AMPS) I24250BRM (25 AMPS)		70010900 OR 70011237*	70010901
20MSP	PRIOR TO 0130010885	ANSI/CSA/LAT/BRAZIL/JPN	24 (DOM. PLUG)	0400241	I24200BRM (20 AMPS) I24250BRM (25 AMPS)		70010900 OR 70011237*	70010901
	0130010885 - PRESENT	ANSI/CSA/CE/AUS/LAT/BRZ/JPN/CHINA	24 (NO PLUG)	1001136381	I24200BRM (20 AMPS) I24250BRM (25 AMPS)		70010900 OR 70011237*	70010901
15MVL	PRIOR TO 0130010826	CE/LAT/BRAZIL/CHI	24 (NO PLUG)	1001136381	I24200BRM (20 AMPS) I24250BRM (25 AMPS)		70010900 OR 70011237*	70010901
	PRIOR TO 0130010826	AUS	24 (AUS PLUG)	0400241	I24200BRM (20 AMPS) I24250BRM (25 AMPS)		70010900 OR 70011237*	70010901
	0130010826 - PRESENT	ANSI/CSA/CE/AUS/LAT/BRZ/JPN/CHINA	24 (NO PLUG)	1001136381	I24200BRM (20 AMPS) I24250BRM (25 AMPS)		70010900 OR 70011237*	70010901
20MVL	PRIOR TO 0130010884	CE/LAT/BRAZIL/CHI	24 (NO PLUG)	1001136381	I24200BRM (20 AMPS) I24250BRM (25 AMPS)		70010900 OR 70011237*	70010901
	PRIOR TO 0130010884	AUS	24 (AUS PLUG)	0400241	I24200BRM (20 AMPS) I24250BRM (25 AMPS)		70010900 OR 70011237*	70010901
	0130010884 - PRESENT	ANSI/CSA/CE/AUS/LAT/BRZ/JPN/CHINA	24 (NO PLUG)	1001136381	I24200BRM (20 AMPS) I24250BRM (25 AMPS)		70010900 OR 70011237*	70010901
20AM/25AM/30AM/ 36AM/41AM	PRIOR TO 0900031664	ANSI/CSA/CE/ AUS/LAT/BRZ/ JPN/ CHI	WET	0400176	PS10BRMAMSPJLG		70011884** (15 AMPS)	
	PRIOR TO 0900031664	ANSI/CSA/CE/ AUS/LAT/BRZ/ JPN/ CHI	DRY	0400176	PS10BRMAMSPJLG		70011884** (15 AMPS)	
	0900031664 - PRESENT	ANSI/CSA/CE/AUS/LAT/BRZ/JPN/CHI/ GWW	WET	0400176	PS10BRMAMSPJLG		70011884** (15 AMPS)	

Pro Charging Systems Battery Charger (cont.)

						RECOMMENDED COMPATIBLE BATTERY CHARGER		
MACHINE	SERIAL NUMBER	SPECIFICATION	VOLTAGE	OEM CHARGER PART NUMBER	PRO CHARGING PART NUMBER	18 AMPS	20 AMPS	25 AMPS
20AM/25AM/30AM/ 36AM/41AM	0900031664 - PRESENT	ANSI/CSA/CE/AUS/ LAT/BRZ/JPN/CHI/ GWW	DRY	0400176	PS10BRMAMSPJLG		70011884** (15 AMPS)	
	0900031664 - PRESENT	ANSI/CSA/CE/AUS/ LAT/BRZ/JPN/CHI/ GWW	AGM	0400212	PS10BRMAMSPJLG		70011884** (15 AMPS)	
T8E/T10E	ALL	CE/JPN	24	100112111	I2420OBRMIECJLG (20 AMPS) I2425OBRMIECJLG (25 AMPS)		70011885	70011886
	ALL	CE/JPN	48	100112111	I4818OBRMTOUJLG	70011888**		
T12E/T26E	ALL (WITHOUT 12V CONVERTER)	ANSI/ANSI EXPORT/ CSA/CE	48	1001152650	I4818OBRMTOUJLG	70011887		
T12E/T32E	ALL	ANSI/ANSI EXPORT/ CSA/CE	24	1001152650	I2420OBRMIECJLG (20 AMPS) I2425OBRMIECJLG (25 AMPS)		70011885	70011886
	ALL	ANSI/ANSI EXPORT/ CSA/CE	48	1001152650	I4818OBRMTOUJLG	70011888**		
T20E/T26E	ALL	ANSI/ANSI EXPORT/ CSA	24	100112111	I2420OBRMIECJLG (20 AMPS) I2425OBRMIECJLG (25 AMPS)		70011885	70011886
	ALL	ANSI/ANSI EXPORT/ CSA	48	100112111	I4818OBRMTOUJLG	70011888**		
ALL OTHER MACHINES								
GS SCISSORS - 1530/1930/2032/ 2632/2046/2646/ 3232/3246			24	66412/105739	I2420OBRMLIFT (20 AMPS) I2425OBRMLIFT (25 AMPS)		70010898	70010899
			24	105739/ 826563	I2420OBRMLIFTIEC (20 AMPS) I2425OBRMLIFTIEC (25 AMPS)		70011889	70011890
GS-2668DC/GS-3268DC			48	36315/36316	I4815OBRMLIFTIEC	70011891**		
			48	36315/ 36316	I4815OBRMLIFTIEC	70011891**		
DLP-25S/30S/35S			24	8029/8030	I2420OBRMLIFT (20 AMPS) I2425OBRMLIFT (25 AMPS)		70010898	70010899
			24	8029/8030	I2420OBRMLIFT (20 AMPS) I2425OBRMLIFT (25 AMPS)		70010898	70010899
GR-12/15/20			24	105739	I2420OBRMLIFT (20 AMPS) I2425OBRMLIFT (25 AMPS)		70010898	70010899
			24	105739	I2420OBRMLIFT (20 AMPS) I2425OBRMLIFT (25 AMPS)		70010898	70010899
TZ-34/20			24	96211/105739/826563	I2420OBRMLIFT (20 AMPS) I2425OBRMLIFT (25 AMPS)		70010898	70010899
			24	96211/105739/826563	I2420OBRMLIFT (20 AMPS) I2425OBRMLIFT (25 AMPS)		70010898	70010899
TZ-50/30			48	96211/105739/826563	I4815OBRMLIFT	70010902**		
Z-34/22DC/Z-40/22DC, Z-45/25DC, Z-45/34DC			48	54794/54795/54796/ 54797	I4815OBRMLIFTSPC	70011892**		
SJIII COMPACT SERIES 3015/3215/3219			24	168884AB/162971AC/ 161827AA/128537AH	I2420OBRMLIFT (20 AMPS) I2425OBRMLIFT (25 AMPS)		70010898	70010899
SJIII COMPACT SERIES 3015/3215/3219			24	168884AB/162971AC/ 161827AA/128537AH	I2420OBRMLIFT (20 AMPS) I2425OBRMLIFT (25 AMPS)		70010898	70010899
SJIII CONVENTIONAL SERIES 3220/3226/4620/4626/ 4632/4832/6832/6826			24	168884AB/162971AC/ 161827AA/128537AH	I2420OBRMLIFT (20 AMPS) I2425OBRMLIFT (25 AMPS)		70010898	70010899
SJIII CONVENTIONAL SERIES 3220/3226/4620/4626/ 4632/4832/6832/6826			24	168884AB, 162971AC, 161827AA, 128537AH	I2420OBRMLIFT (20 AMPS) I2425OBRMLIFT (25 AMPS)		70010898	70010899

Pro Charging Systems Battery Charger - 6 AMP

						RECOMMENDED COMPATIBLE BATTERY CHARGER	
MACHINE	SERIAL NUMBER	SPECIFICATION	VOLTAGE	OEM CHARGER PART NUMBER	PRO CHARGING PART NUMBER	6 AMP RS1/IS1 1 BANK PER CHARGER	6 AMP RS2/IS2 2 BANKS PER CHARGER
JLG® VERTICALS							
10VP	ALL	ANSI/CSA/CE/AUS/ LAT/BRZ/JPN/CHI	12	0400164	RS1/IS1 (6 AMPS/BANK, 1 BANK/CHARGER) RS2/IS2 (6 AMPS/BANK, 2 BANKS/CHARGER)	70010903**	70010904**
	ALL	ANSI/CSA/CE/ AUS/ LAT/BRZ/ JPN/ CHI	12	0400166	RS1/IS1 (6 AMPS/BANK, 1 BANK/CHARGER) RS2/IS2 (6 AMPS/BANK, 2 BANKS/CHARGER)	70010903**	70010904**
	ALL	ANSI/CSA/CE/ AUS/ LAT/BRZ/ JPN/ CHI	12	0400167	RS1/IS1 (6 AMPS/BANK, 1 BANK/CHARGER) RS2/IS2 (6 AMPS/BANK, 2 BANKS/CHARGER)	70010903**	70010904**
	ALL	ANSI/CSA/CE/ AUS/ LAT/BRZ/ JPN/ CHI	12	0400165	RS1/IS1 (6 AMPS/BANK, 1 BANK/CHARGER) RS2/IS2 (6 AMPS/BANK, 2 BANKS/CHARGER)	70010903**	70010904**

Pro Charging Systems Battery Charger - 6 AMP (cont.)

MACHINE	SERIAL NUMBER	SPECIFICATION	VOLTAGE	OEM CHARGER PART NUMBER	PRO CHARGING PART NUMBER	RECOMMENDED COMPATIBLE BATTERY CHARGER	
						6 AMP RS1/IS1 1 BANK PER CHARGER	6 AMP RS2/IS2 2 BANKS PER CHARGER
10VP	ALL	ANSI/CSA/CE/ AUS/ LAT/BRZ/ JPN/ CHI	12	0400157	RS1/IS1 (6 AMPS/BANK, 1 BANK/CHARGER) RS2/IS2 (6 AMPS/BANK, 2 BANKS/CHARGER)	70010903**	70010904**
	ALL	ANSI/CSA/CE/ AUS/ LAT/BRZ/ JPN/ CHI	12	0400173	RS1/IS1 (6 AMPS/BANK, 1 BANK/CHARGER) RS2/IS2 (6 AMPS/BANK, 2 BANKS/CHARGER)	70010903**	70010904**
15VP	ALL	ANSI/CSA/CE/ AUS/ LAT/BRZ/ JPN/ CHI	12	0400164	RS1/IS1 (6 AMPS/BANK, 1 BANK/CHARGER) RS2/IS2 (6 AMPS/BANK, 2 BANKS/CHARGER)	70010903**	70010904**
	ALL	ANSI/CSA/CE/ AUS/ LAT/BRZ/ JPN/ CHI	12	0400166	RS1/IS1 (6 AMPS/BANK, 1 BANK/CHARGER) RS2/IS2 (6 AMPS/BANK, 2 BANKS/CHARGER)	70010903**	70010904**
	ALL	ANSI/CSA/CE/ AUS/ LAT/BRZ/ JPN/ CHI	12	0400167	RS1/IS1 (6 AMPS/BANK, 1 BANK/CHARGER) RS2/IS2 (6 AMPS/BANK, 2 BANKS/CHARGER)	70010903**	70010904**
	ALL	ANSI/CSA/CE/ AUS/ LAT/BRZ/ JPN/ CHI	12	0400165	RS1/IS1 (6 AMPS/BANK, 1 BANK/CHARGER) RS2/IS2 (6 AMPS/BANK, 2 BANKS/CHARGER)	70010903**	70010904**
	ALL	ANSI/CSA/CE/ AUS/ LAT/BRZ/ JPN/ CHI	12	0400157	RS1/IS1 (6 AMPS/BANK, 1 BANK/CHARGER) RS2/IS2 (6 AMPS/BANK, 2 BANKS/CHARGER)	70010903**	70010904**
	ALL	ANSI/CSA/CE/ AUS/ LAT/BRZ/ JPN/ CHI	12	0400173	RS1/IS1 (6 AMPS/BANK, 1 BANK/CHARGER) RS2/IS2 (6 AMPS/BANK, 2 BANKS/CHARGER)	70010903**	70010904**
20VP	ALL	ANSI/CSA/CE/ AUS/ LAT/BRZ/ JPN/ CHI	12	0400164	RS1/IS1 (6 AMPS/BANK, 1 BANK/CHARGER) RS2/IS2 (6 AMPS/BANK, 2 BANKS/CHARGER)	70010903**	70010904**
	ALL	ANSI/CSA/CE/ AUS/ LAT/BRZ/ JPN/ CHI	12	0400166	RS1/IS1 (6 AMPS/BANK, 1 BANK/CHARGER) RS2/IS2 (6 AMPS/BANK, 2 BANKS/CHARGER)	70010903**	70010904**
	ALL	ANSI/CSA/CE/ AUS/ LAT/BRZ/ JPN/ CHI	12	0400167	RS1/IS1 (6 AMPS/BANK, 1 BANK/CHARGER) RS2/IS2 (6 AMPS/BANK, 2 BANKS/CHARGER)	70010903**	70010904**
	ALL	ANSI/CSA/CE/ AUS/ LAT/BRZ/ JPN/ CHI	12	0400165	RS1/IS1 (6 AMPS/BANK, 1 BANK/CHARGER) RS2/IS2 (6 AMPS/BANK, 2 BANKS/CHARGER)	70010903**	70010904**
	ALL	ANSI/CSA/CE/ AUS/ LAT/BRZ/ JPN/ CHI	12	0400157	RS1/IS1 (6 AMPS/BANK, 1 BANK/CHARGER) RS2/IS2 (6 AMPS/BANK, 2 BANKS/CHARGER)	70010903**	70010904**
	ALL	ANSI/CSA/CE/ AUS/ LAT/BRZ/ JPN/ CHI	12	0400173	RS1/IS1 (6 AMPS/BANK, 1 BANK/CHARGER) RS2/IS2 (6 AMPS/BANK, 2 BANKS/CHARGER)	70010903**	70010904**
ALL OTHER MACHINES							
AWP- 20S/25S/30S/ 36S/40S			24	6671/6688/80990	RS1/IS1 (6 AMPS/BANK, 1 BANK/CHARGER) RS2/IS2 (6 AMPS/BANK, 2 BANKS/CHARGER)	70010903**	
			24	6671/6688/80990	RS1/IS1 (6 AMPS/BANK, 1 BANK/CHARGER) RS2/IS2 (6 AMPS/BANK, 2 BANKS/CHARGER)	70010903**	
IWP-20S/25S/30S			24	80990	RS1/IS1 (6 AMPS/BANK, 1 BANK/CHARGER) RS2/IS2 (6 AMPS/BANK, 2 BANKS/CHARGER)	70010903**	
			24	80990	RS1/IS1 (6 AMPS/BANK, 1 BANK/CHARGER) RS2/IS2 (6 AMPS/BANK, 2 BANKS/CHARGER)	70010903**	

*Not a direct ship from vendor, so will ship from JLG warehouse.
NOTE: Returned chargers have a 20% restock fee.

**Not equipped with DeltaView Link wireless data collection capability.

Delta View® Link

Wireless connectivity to your Procharging Systems chargers (PCS) allows you to monitor the condition of your batteries and manage your equipment/fleet on your iOS™ or Android™ mobile devices. Data to access:

- Current state of charge - for a single unit or your fleet
- Historical charging data (100 cycles)
- Date and time stamp information
- Early charge termination(s) details
- Assign a name and/or asset number
- Real-time status and amp hours used/replaced
- Location assistance - extended wireless range
- One button push to call tech support
- One button push to upload historical data to an email
- View tutorials, videos, definitions and more
- PCS chargers will support our previously released DeltaView® Reader
- Free to download

NOTE: Works on Eagle Performance and Patriot Series Pro Charging System chargers only

Please refer to OEM manual to confirm correct part number and machine serial number. JLG makes no representation that any competitive part is an exact replacement for any given OEM part specified by the original manufacturer, or that JLG has received any approval or sponsorship by – or is in any way affiliated or associated with – any such original manufacturer. All manufacturer names are registered trademarks by their business or other parent company.

JLG Industries, Inc. ("JLG") is not affiliated with – and makes no representation that it is affiliated with – any manufacturer or manufacturers identified on this page. The descriptions provided herein are for identification purposes only, and JLG makes no representation or warranty with respect to the accuracy of any such descriptions. ACCORDINGLY, JLG EXPRESSLY DISCLAIMS ANY EXPRESSLY OR IMPLIED WARRANTIES NOT OTHERWISE PROVIDED FOR IN THIS CATALOG, INCLUDING – BUT NOT LIMITED TO – ANY WARRANTY THAT THE PRODUCT(S) DESCRIBED ON THIS PAGE ARE FIT FOR A PARTICULAR PURPOSE OR FOR A PARTICULAR PIECE OF EQUIPMENT, OR THAT ANY SUCH PRODUCT(S) CONFORM EXACTLY TO THE DESCRIPTIONS OR REFERENCES USED IN THE DESCRIPTIONS. JLG expressly reserves the right to correct any errors made in this publication.

Refer to Special Information Regarding Batteries on page 3.

Can't find what you're looking for? Contact the Aftermarket Parts Team at 877-JLG-LIFT (877-554-5438) or visit online at www.maxquip.jlg.com.

AGM/BC Battery Chargers

Raise Your Productivity with Universal Battery Chargers

This compact battery charger is completely enclosed and sealed for protection against pressure washers, dirt and debris. Each charger is equipped with a 3-prong plug, AC cord and color-coded DC leads with 3/8 in. terminals. The LED charge indicator lights are steady when charging and blink when charge is complete.



Features and Benefits

- Universal fit and function charger
- Vibration resistant
- LED light indicates charge progress
- Made in the USA

Customers who have purchased an AGM or BC battery charger have usually purchased a QuiQ Programmer (part number 2915230, under tools).



AGM/BC Battery Chargers

VOLTAGE IN (AC)	VOLTAGE OUT (DC)	AMPERAGE OUT (DC)	REFERENCE NUMBER	JLG PART NUMBER
120	24	40	BC1202440	0400071
120	48	15	BC1204815	7040734
120	48	25	BC1204825	7040933
120	36	25	BC1203625	7041005
120	12	35	BC1201235	7040973
120	24	25	BC1202425	7040429
120	36	35	BC1203635	7040875
120	24	15	BC1202415	70010674
120	12	10	BC1201210	70010670
120	12	15	BC1201215	70010671
120	24	10	BC1202410	70010673
120	24	25	BC1202425	70010807
120	12	35	AGM/FL1201235	70010554
120	24	40	AGM/FL1202440	70010559
120	36	25	AGM/FL1203625	7041005
120	36	35	AGM/FL1203635	70010563
120	48	25	AGM/FL1204825	70010565

VOLTAGE IN (AC)	VOLTAGE OUT (DC)	AMPERAGE OUT (DC)	MODELS	JLG PART NUMBER
BATTERY CHARGERS FOR OTHER AWPS				
120	24		USED ON GENIE® GR - 12/GR-15/GR-20 AND MOST GENIE ELECTRIC SCISSORS	GN96950GT
120	24	19	USED ON MOST GENIE ELECTRIC SCISSORS	GN105739GT*
120			GENIE AWP AND IWP SUPER SERIES	GN80990GT
120			HY-BRID HB-1030/HB-1430	HBELEC-645
120	24	18	USED ON UPRIGHT MX-15/MX-19	UP69199-001

*115 in. replacement cord (part number GN144130GT).

Refer to Special Information Regarding Batteries on page 3.

Can't find what you're looking for? Contact the Aftermarket Parts Team at 877-JLG-LIFT (877-554-5438) or visit online at www.maxquip.jlg.com.

Battery Discharger

Optimize Battery Capacity and Life

A battery discharger can be used to determine battery capacities, and to help identify defective batteries or cells in battery sets. Knowing the condition of a battery allows better maintenance to optimize both daily battery capacity and overall battery life.



Features and Benefits

- Fully portable
- Simple to operate
- Worldwide operation
- DC powered from the connected battery set – no AC power required
- Automatic battery discharging
- Laptop/PC interface, allowing dischargers to be connected to a computer via the RS-232 serial port to display in real time, analyze and archive discharge data
- Thermal protection from overheating during operation
- Durable powder-coated steel case
- Large 500-amp alligator clamps
- Heavy-duty 8 ft DC cables
- Made in the USA

BATTERY VOLTS	DISCHARGE AMPS	SHIP WEIGHT, APPROX. (LBS)	JLG PART NUMBER
12/24V	75	20	70011966
36/48V	75 (AT 36V)/56.25 (AT 48V)	20	70011967
72V	75	33	70011968

Refer to Special Information Regarding Batteries on page 3.

Can't find what you're looking for? Contact the Aftermarket Parts Team at 877-JLG-LIFT (877-554-5438) or visit online at www.maxquip.jlg.com.


Accessories: Battery Tester and DeltaView® Reader

Battery/Alternator Tester

The tester can be used to perform a state-of-charge test on both conventional and maintenance-free batteries. In addition, the tester can be used to check for faulty regulators and defective output diodes.

Features and Benefits

- Used for both 6V and 12V systems
- Heavy-duty insulated clamps
- 300-amp jaws

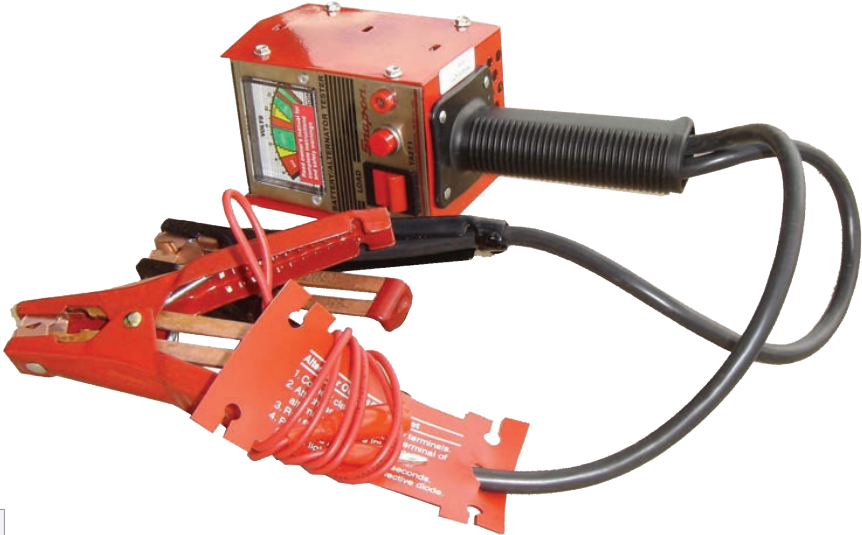

BATTERY VOLTS	JLG PART NUMBER
6/12V	7025943

Refer to Special Information Regarding Batteries on page 3.
Can't find what you're looking for? Contact the Aftermarket Parts Team at 877-JLG-LIFT (877-554-5438) or visit online at www.maxquip.jlg.com.

JLG Delivery Days - Canada and Alaska Remote Locations Only

This chart is intended for reference only. Conditions outside our control may cause changes and/or delays in delivery. If your territory is remote and not shown, please call to confirm delivery options.

Alberta Province	
Bonnyville	Every 2nd week, order needs to be in our system the Friday at the latest before the route, or on demand at freight charge depends on weight TBD
Brooks	Not serviced, freight charge will apply TBD at time of order
Drayton Valley	Every 2nd week, order needs to be in our system the Friday at the latest before the route, or on demand at freight charge depends on weight TBD
Fort McMurray	Every 14 days OR on demand at \$350 freight charge
Grande Prairie	Every 2nd week, order needs to be in our system the Friday at the latest before the route, or on demand at freight charge depends on weight TBD
Lethbridge	Every Thursday, order needs to be in our system on Wednesday at the latest
Lloydminster	Not serviced, freight charge will apply TBD at time of order
Medicine Hat	Every other Friday order needs to be in our system latest the day before
Red Deer	Every 2nd week, order needs to be in our system the Friday at the latest before the route, or on demand at freight charge depends on weight TBD
Whitecourt	Every 2nd week, order needs to be in our system the Friday at the latest before the route, or on demand at freight charge depends on weight TBD
British Columbia Province	
Armstrong	Every 2nd week, order needs to be in our system the Friday at the latest before the route, or on demand at freight charge depends on weight TBD
Campbell River	Every week Thursday, unless stat on Friday - order needs to be in our system latest Wednesday by noon
Chilliwack	Every Monday, unless stat - order needs to be in our system by Friday 3pm or latest Monday 8:30am
Courtenay	Every week Thursday, unless stat on Friday - order needs to be in our system latest Wednesday by noon
Dawson Creek	Not serviced, freight charge will apply TBD at time of order
Fort St John	Not serviced, freight charge will apply TBD at time of order
Kamloops	Every 2nd week, order needs to be in our system the Friday at the latest before the route, or on demand at freight charge depends on weight TBD -
Kelowna	Every 2nd week, order needs to be in our system the Friday at the latest before the route, or on demand at freight charge depends on weight TBD
Nanaimo	Every week Thursday, unless stat on Friday - order needs to be in our system latest Wednesday by noon
Prince George	Every 2nd week, order needs to be in our system the Friday at the latest before the route, or on demand at freight charge depends on weight TBD
Terrace	Every 2nd week if enough to go that far, otherwise we ship from PG, order needs to be in our system the Friday at the latest before the route, or on demand at freight charge depends on weight TBD
Vernon	Every 2nd week, order needs to be in our system the Friday at the latest before the route, or on demand at freight charge depends on weight TBD
Victoria	Every week Friday, unless stat on Friday - order needs to be in our system latest Wednesday by noon
Manitoba Province	
Brandon	Weekly on Tuesdays
Saskatchewan Province	
Moose Jaw	Weekly on Wednesdays
North Battleford	Weekly on Wednesdays
Prince Albert	Weekly on Thursdays
Alaska	
Anchorage	3-5 business days
Fairbanks	3-5 business days

JLG Industries, Inc.
1 JLG Drive
McConnellsburg, PA 17233-9533
Telephone 717-485-5161
Toll-free in US 877-JLG-LIFT
Fax 717-485-6417
www.jlg.com
An Oshkosh Corporation Company

Part No. 401017
REV1217
Printed in USA

